

METAL SOLUTIONS

EOS MaragingSteel MS1

Material Data Sheet

EOS MARAGINGSTEEL MS1

Parts built in EOS MaragingSteel MS1 have a chemical composition corresponding to US classification 18% Ni Maraging 300, European 1.2709 and German X3NiCoMoTi 18-9-5. This kind of steel is characterized by having very good mechanical properties, and being easily heat-treatable using a simple thermal age-hardening process to obtain excellent hardness and strength. Parts built from EOS MaragingSteel MS1 are easily machinable after the building process and can be easily post-hardened to more than 50 HRC by age-hardening at 490 °C (914 °F) for 6 hours. In both as-built and age-hardened states the parts can be machined, spark-eroded, welded, micro shot-peened, polished and coated if required. Due to the layerwise building method, the parts have a certain anisotropy, which can be reduced or removed by appropriate heat treatment.

MAIN CHARACTERISTICS

- The parts are easily post-hardened to more than 50 HRC
- The parts can be machined, spark-eroded, welded, micro shot-peened, polished and coated
- Chemical composition corresponding to 18Ni300 and M300

Download Process Data Sheet (PDF) →

TYPICAL APPLICATIONS

- Injection molding tools & inserts
- Mechanical engineering parts


The EOS Quality Triangle

EOS uses an approach that is unique in the AM industry, taking each of the three central technical elements of the production process into account: the system, the material and the process. The data resulting from each combination is assigned a Technology Readiness Level (TRL) which makes the expected performance and production capability of the solution transparent.

EOS incorporates these TRLs into the following two categories:

- Premium products (TRL 7-9): offer highly validated data, proven capability and reproducible part properties.
- Core products (TRL 3 and 5): enable early customer access to newest technology still under development and are therefore less mature with less data.

All of the data stated in this material data sheet is produced according to EOS Quality Management System and international standards

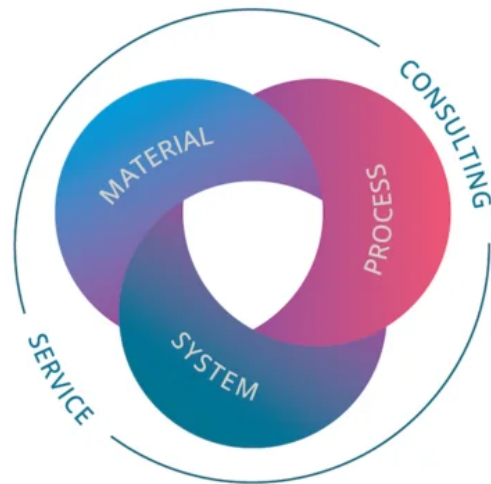

POWDER PROPERTIES


Parts built in EOS MaragingSteel MS1 have a chemical composition following US classification 18% Ni Maraging 300, European 1.2709 and German X3NiCoMoTi 18-9-5.

Powder Chemical Composition (wt.-%)

Element	Min.	Max.
Ni	17	19
Co	8.5	9.5
Mo	4.5	5.2
Ti	0.6	0.8
Al	0.05	0.15
Cr	-	0.5
Cu	-	0.5
C	-	0.03
Mn	-	0.1
Si	-	0.1
P	-	0.01
S	-	0.01

Powder Particle Size

GENERIC PARTICLE SIZE DISTRIBUTION	15 - 65 µm
------------------------------------	------------

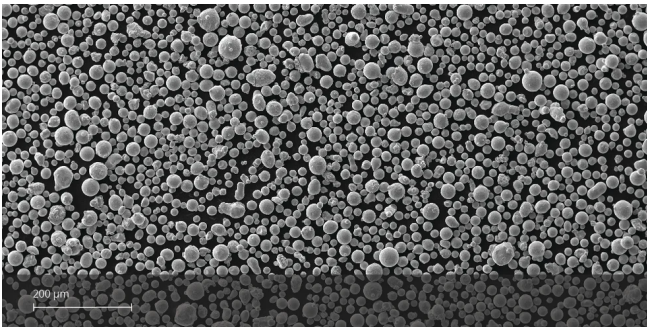

HEAT TREATMENT

Description

Heat treatment procedure

Steps

Solution treatment at 940 °C (1724 °F) for 2 hours, air cooling + ageing at 490 °C for 6 hours, air cooling.

HEADQUARTERS

EOS GmbH
Electro Optical Systems

Robert-Stirling-Ring 1
82152 Krailling / Munich
Germany

Tel.: +49 89 893 36-0
Email: info@eos.info
URL: www.eos.info

This powder has not been developed, tested or certified as a medical device according to Directive 93/42/EEC (MDD) or Regulation (EU) 2017/745 (MDR) and is not intended to be used as a medical device, in particular for the purposes specified in Art. 2 No. 1 MDR. Insofar as you intend to use the powder as raw material for the manufacture of pharmaceutical products or medical devices (e.g. as raw material which as a material must meet the requirements of Annex 1, Chapter II MDR), the responsibility and liability for all analyses, tests, evaluations, procedures, risk assessments, conformity assessments, approval and certification procedures as well as for all other official and regulatory measures required for this purpose shall lie solely with you both with regard to the pharmaceutical product and/or medical device manufactured by you and with regard to the properties, suitability, testing, evaluation, risk assessment, other requirements for use of the powder as raw material. In this respect, the limitations of liability pursuant to our General Terms and Conditions and the system sales or material contracts shall apply.

Part properties are provided for information purposes only and EOS makes no representation or warranty, and disclaims any liability, with respect to actual part properties achieved. Part properties are dependent on a variety of influencing factors and therefore, actual part properties achieved by the user may deviate from the information stated herein. This document does not on its own represent a sufficient basis for any part design, neither does it provide any agreement or guarantee about the specific properties of a material or part or the suitability of a material or a part for a specific application.

The achievement of certain part properties as well as the assessment of the suitability of this material for a specific purpose is the sole responsibility of the user. Any information given herein is subject to change without notice.

Status as of 17.04.2025. Subject to technical modifications. EOS is certified according to ISO 9001.

EOS®, Additive Minds®, Alumide®, AMQ®, CarbonMide®, DirectMetal®, DMLS®, EOSAME®, EOSINT®, EOSIZE®, EOSPACE®, EOSPRINT®, EOSTATE®, EOSTYLE®, FORMIGA®, LaserProFusion®, PA 2200®, PrimeCast® and PrimePart® are registered trademarks of EOS GmbH Electro Optical Systems in some countries. For more information visit www.eos.info/trademarks.